

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

ORIGINAL

FIELD NOTES

OF

THE DEPENDENT RESURVEY OF

A PORTION OF THE EAST BOUNDARY,

A PORTION OF THE SUBDIVISIONAL LINES,

AND

THE SUBDIVISION OF SECTIONS 10, 15, 21, AND 22,

IN

TOWNSHIP 36 SOUTH, RANGE 15 WEST,

OF THE SALT LAKE MERIDIAN
IN THE STATE OF UTAH

EXECUTED BY

Jeremy D. Davis
Cadastral Surveyor

Under the Supervision of

Ronald K. Baugh
Supervisory Cadastral Surveyor

Under Special Instructions dated **April 27, 2007**, approved **April 27, 2007**, which provided for the surveys included under Group Number **1049**, and Assignment Instructions dated **April 27, 2007**, and Reassignment Instructions dated **July 20, 2007**.

Survey Commenced, **May 22, 2007**
Survey Completed, **August 9, 2007**

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

ORIGINAL

FIELD NOTES

OF

THE DEPENDENT RESURVEY OF

A PORTION OF THE EAST BOUNDARY,

A PORTION OF THE SUBDIVISIONAL LINES,

AND

THE SUBDIVISION OF SECTIONS 10, 15, 21, AND 22,

IN

TOWNSHIP 36 SOUTH, RANGE 15 WEST,

OF THE SALT LAKE MERIDIAN
IN THE STATE OF UTAH

EXECUTED BY

Jeremy D. Davis
Cadastral Surveyor

Under the Supervision of

Ronald K. Baugh
Supervisory Cadastral Surveyor

Under Special Instructions dated **April 27, 2007**, approved **April 27, 2007**, which provided for the surveys included under Group Number **1049**, and Assignment Instructions dated **April 27, 2007**, and Reassignment Instructions dated **July 20, 2007**.

Survey Commenced, **May 22, 2007**
Survey Completed, **August 9, 2007**

INDEX DIAGRAM

Township 36 South, Range 15 West.

6	5	4	3	2	1
7	8	9	22 21 10 20	13 11 13	12 7
18	17	16	19 15	11 14	6 13
19	20	25 24 21 23	18 16 22 15	11 10 23	5 24
30	29	28	27	26	25
31	32	33	34	35	36

3

The Subdivision of Section 10.....Page 27
The Subdivision of Section 15.....Page 28
The Subdivision of Section 21.....Page 32
The Subdivision of Section 22.....Page 35

T. 36 S., R. 15 W., SALT LAKE MERIDIAN, UTAH

The following field notes are those of the dependent resurvey of a portion of the east boundary, and a portion the subdivisional lines, and the subdivision of sections 10, 15, 21, and 22, in T. 36 S., R. 15 W., Salt Lake Meridian, Utah.

HISTORY OF SURVEYS

Surveyed by		Retr. or Resurveyed by	
SOUTH BOUNDARY			
Portion	A.J. Stewart Jr.	1874	
All	T.C. Bailey	1881	
Portion		F.T. Roberts	1909
Portion		A. Nelson	1939
Remonumentation		A. Nelson	1961
Remonumentation		G.E. Reynolds	1975
EAST BOUNDARY			
Portion	A.J. Stewart Jr.	1873	
Portion	F.T. Roberts	1909	
WEST BOUNDARY (Pine Valley Guide Meridian)			
All	T.C. Bailey	1881	
All		M.H. Dalley	1889
Portion		L.V. Judd	2004
Remonumentation		F.D. Reynolds	1968
NORTH BOUNDARY (Seventh Standard Parallel South)			
All	C.L. Ericzon	1875	
Portion		T.C. Bailey	1881
SUBDIVISION			
Portion	A.J. Stewart Jr.	1874	
Portion	F.T. Roberts	1909	F.T. Roberts 1909
Portion		L.V. Judd	2004
Remonumentation		F.D. Reynolds	1968

PRIVATE SURVEYS

A survey was executed by Stephen R. Platt, L.S. 4501, with a plat dated December 1, 1978, on record at the Iron County Engineers Office.

A survey was executed by Stephen R. Platt, L.S. 4501, with a plat dated December 31, 1984, on record at the Iron County Engineers Office.

A survey was executed by Tom O. McCullough, L.S. 6918, with a plat dated February 28, 1991, on record at the Iron County Engineers Office.

A survey was executed by Doug Grimshaw, L.S. 174457, with a plat dated January 6, 1997, on record at the Iron County Engineers Office.

T. 36 S., R. 15 W., SALT LAKE MERIDIAN, UTAH

The survey was executed in accordance with the specifications set forth in the Manual of Surveying Instructions, 1973, and the Special Instructions for Group No. 1049, dated April 27, 2007.

The direction of the lines was determined by references to true meridians, established by Global Positioning System (GPS) utilizing Real-Time Kinematic (RTK) techniques throughout the survey. The positional accuracy of this survey complies with the *Standards and Guidelines for Cadastral Surveys Using GPS Methods*, dated May 9, 2001, Version 1.0. Trimble model 5800 GPS receivers were used for field collection. Cadastral Measurement Management (CMM) software was the primary software utilized for project calculations.

Preliminary to the resurvey, the lines of the prior surveys were retraced and search was made for all corners and their calls of record. Identified corners were remonumented in their original positions. Lost corners were reestablished and remonumented at proportionate positions based on the official record. The retracement data was thoroughly verified and only the true line field notes are given herein.

Cadastral Control Network was derived from GPS static observations, post processed by the National Geodetic Survey, Online Positioning Users Service (OPUS), utilizing Continuously Operating Reference Stations (CORS); ECHO ECHO_BRGN_NV1999, FRED FREDONIA, and MARYSVALE_UT2006.

The geographic position of the corner of sections 22, 23, 26, and 27, as determined by direct RTK methods from the National Geodetic Survey OPUS, is as follows:

Latitude: 37°38'51.610" N.,
Longitude: 113°30'43.936" W., NAD 1983,
Network Accuracy = 0.200 meter at 95% confidence.

THE DEPENDENT RESURVEY OF A PORTION OF THE EAST BOUNDARY,
T. 36 S., R. 15 W., SALT LAKE MERIDIAN, UTAH

CHAINS

The Dependent Resurvey of a Portion of the East Boundary,
T. 36 S., R. 15 W., Salt Lake Meridian, Utah.

The Reestablishment of the Survey Executed by
A.J. Stewart Jr. in 1873

Beginning at the corner of sections 13, 18, 19, and 24,
monumented with a granite stone, 22x8x4 inches, firmly set, in
a mound of stone 3 feet base by 1 feet high, clearly marked 3
notches on north and south edges.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter,
20 inches in the ground to solid rock, in a mound of stone 3
feet base to top of aluminum cap marked:

T36S	
R15W R14W	
<u>S13</u>	<u>S18</u>
<u>S24</u>	<u>S19</u>
2007	

Deposit the marked stone alongside the aluminum post.

Deposit a magnet enclosed in a plastic case at the base of the
aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls on a gradual southwest slope in piñon and juniper
growth.

N. 0°47.2' E., between sections 13 and 18.

40.820 The 1/4 section corner of sections 13 and 18, monumented with
a granite stone, 16x10x4 inches, loosely set, clearly marked
1/4 on west face.

From which the original bearing trees

A cedar, 6 inches diameter, bears S. 10° E., 273 links
distance, with no visible scribe marks on an open
blaze. (Record; S. 9° E., 265 links)

A cedar, 8 inches diameter, bears S. 32° W., 84 links
distance, with no visible scribe marks on an open
blaze. (Record; S. 30° W, 95 links)

At the corner point

THE DEPENDENT RESURVEY OF A PORTION OF THE EAST BOUNDARY,
T. 36 S., R. 15 W., SALT LAKE MERIDIAN, UTAH

CHAINS

Set an aluminum post, 30 inches long, 2 1/2 inches diameter,
26 inches in the ground, with aluminum cap marked:

T36S
R15W R14W
1/4
S13|S18
2007

Deposit the marked stone alongside the aluminum post.

Deposit a magnet enclosed in a plastic case at the base of the
aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls on open ground in sagebrush.

N. 0°03.6' E., beginning new measurement.

40.803 The corner of sections 7, 12, 13, and 18, monumented with a
granite stone, 20x12x8 inches, firmly set, clearly marked 4
notches on south and 2 notches on north edges, and witnessed
with a mound of stone 3 feet base by 1 foot high to the east.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter,
26 inches in the ground, with aluminum cap marked:

T36S
R15W R14W
S12|S7
S13|S18
2007

Deposit the marked stone alongside the aluminum post.

Deposit a magnet enclosed in a plastic case at the base of the
aluminum post.

Raise a mound of stone, 3 feet by 2 feet base by 2 feet high,
west of the aluminum post.

Corner falls on a gradual south slope.

The Dependent Resurvey of a Portion of the Subdivisional Lines
T. 36 S., R. 15 W., Salt Lake Meridian, Utah.

The Reestablishment of the Survey Executed by
A.J. Stewart Jr. in 1874

THE DEPENDENT RESURVEY OF THE SUBDIVISIONAL LINES,
T. 36 S., R. 15 W., SALT LAKE MERIDIAN, UTAH

CHAINS

From the corner of sections 13, 18, 19, and 24, on the east boundary of the township, hereinbefore described.

N. 88°52.4' W., between sections 13 and 24.

40.288 The 1/4 section corner of sections 13 and 24, monumented with a granite stone, 16x10x8 inches, firmly set, dimly marked 1/4 on north face.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 20 inches in the ground to solid rock, in a mound of stone 3 feet base to top of aluminum cap marked:

T36SR15W
S13
1/4 —
S24
2007

Deposit the marked stone alongside the aluminum post.

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls in rolling sagebrush.

N. 89°42.8' W., beginning new measurement.

43.524 The corner of sections 13, 14, 23, and 24, monumented with a granite stone, 24x18x8 inches, loosely set, clearly marked 3 notches on south, and 1 notch on east edges.

From which the original bearing trees

A juniper, 14 inches diameter, bears N. 84° E., 33 links distance, scribed T36S R15W S13 BT. (Record; N. 80° E., 95 links)

A juniper, 8 inches diameter, bears S. 35° E., 140 links distance, with illegible scribe marks visible on an open blaze. (Record; S. 40° E.)

A juniper, 14 inches diameter, bears S. 15° W., 32 links distance, with no visible scribe marks on an open blaze. (Record; S. 5° W., 30 links)

A juniper, 6 inches diameter, bears N. 76° W., 114 links distance, with illegible scribe marks on an open blaze. (Record; N. 82½° W., 111 links)

THE DEPENDENT RESURVEY OF THE SUBDIVISIONAL LINES,
T. 36 S., R. 15 W., SALT LAKE MERIDIAN, UTAH

CHAINS

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 6 inches in the ground, to solid rock, in a mound of stone 3 feet base to top of aluminum cap marked:

T36SR15W
S14|S13
S23|S24
2007

Deposit the marked stone alongside the aluminum post.

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Set a steel fence post alongside the aluminum post.

N. 0°45.1' E., between sections 13 and 14.

39.180 The 1/4 section corner of sections 13 and 14, monumented with a granite stone, 20x9x4 inches, loosely set, clearly marked 1/4 on west face.

From which the original bearing tree

A juniper, 14 inches diameter, bears S. 55° E., 27 links distance, with scribe marks visible through a partially healed blaze. (Record; S. 60° E., 19 links)

No remaining evidence of the southwest bearing tree was found.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 20 inches in the ground to solid rock, in a mound of stone 4 feet base to top of aluminum cap marked:

T36SR15W
1/4
S14|S13
2007

Deposit the marked stone alongside the aluminum post.

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls on a steep west slope.

THE DEPENDENT RESURVEY OF THE SUBDIVISIONAL LINES,
T. 36 S., R. 15 W., SALT LAKE MERIDIAN, UTAH

CHAINS

N. 0°06.6' E., beginning new measurement.

40.540 The corner of sections 13 and 14 only, monumented with a granite stone, 18x6x4 inches, lying on the ground, clearly marked 3 notches on one edge, no other marks visible. (Record; marked 4 notches on south and 1 notch on east edges.)

From which the original bearing trees

A juniper, 10 inches, diameter, bears N. 78° E., 37 links distance, with illegible scribe marks on an open blaze. (Record; N. 77° E., 38 links)

A juniper, 8 inches diameter, bears S. 40° E., 26 links distance, with a healed blaze. (Record; S. 45° E., 27 links)

A juniper, dead and standing, 6 inches diameter, bears S. 15° W., 68 links distance, with illegible scribe marks on an open blaze.

A juniper limb, 8 inches diameter, bears N. 55° W., 109 links distance, with illegible scribe marks on an open blaze. (Record; N. 60° W., 105 links)

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with aluminum cap marked:

R36SR15W
S14|S13
2007

Bury the marked stone alongside the aluminum post.

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Set a steel fence post alongside the aluminum post.

The Reestablishment of the Survey Executed by
A.J. Stewart Jr. in 1874, and Resurveyed by
F.T. Roberts in 1909.

From the corner of sections 7, 12, 13, 18, on the east boundary of the township, hereinbefore described.

S. 89°49.9' W., on the north boundary of section 13.

39.909 The 1/4 section corner of section 12 only.

THE DEPENDENT RESURVEY OF THE SUBDIVISIONAL LINES,
T. 36 S., R. 15 W., SALT LAKE MERIDIAN, UTAH

CHAINS

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 15 inches in the ground, to solid rock, in a mound of stone 4 feet base to top of aluminum cap marked:

T36SR15W
1/4 S12
2007

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls in a wash, drains west, in sagebrush and juniper growth.

40.788

The 1/4 section corner of section 13 only, monumented with a granite stone, 18x9x6 inches, firmly set, clearly marked 1/4 on north face.

From which the original bearing trees

A juniper, 6 inches diameter, bears **S. 45° E., 48 links** distance, with no visible scribe marks on an open blaze.
(Record; **45 links**)

A juniper, 8 inches diameter, bears **N. 73° W., 87 links** distance, with no visible scribe marks on an open blaze.
(Record; **N. 77° W.**)

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 10 inches in the ground, to solid rock, in a mound of stone 4 feet base to top, with aluminum cap marked:

T36SR15W
1/4 S13
2007

Deposit the marked stone alongside the aluminum post.

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls 10 feet south of bottom of wash, drains west, on a north slope.

S. 88°58.3' W., beginning new measurement.

THE DEPENDENT RESURVEY OF THE SUBDIVISIONAL LINES,
T. 36 S., R. 15 W., SALT LAKE MERIDIAN, UTAH

CHAINS

39.030

True point for the closing corner of sections 11 and 12 only,
not monumented.

From this point

The closing corner of sections 11 and 12 only, bears **NORTH**,
0.019 chains distance, monumented with an iron pipe, 2 inches
diameter, firmly set, in a mound of stone, 4 ft. base to top
of brass cap marked as described in the official record of the
1909 resurvey.

I add AM and 2007 to brass cap.

From which the original bearing trees

A juniper, 8 inches diameter, bears **N. 23° E., 141 links**
distance, with open blaze scribed "S12 BT".
(Record; **N. 46° E., 140 links**)

A juniper, 6 inches diameter, bears **N. 55° W., 39 links**
distance, with illegible scribe marks on an open blaze.
(Record; **N. 54° W., 38 links**)

Set a steel fence post alongside the iron pipe.

Corner is located at top of a gentle west slope.

43.015

The corner of sections 13 and 14 only.

The Reestablishment of the Survey Executed by
A.J. Stewart Jr. in 1874.

From the corner of sections 22, 23, 26, and 27, monumented
with a granite stone, 22x16x6 inches, firmly set, clearly
marked 2 notches on east and 2 notches on south edges.

The southwest bearing tree was found down and dead, not
remeasured.

No remaining evidence of the northeast and southeast bearing
trees were found.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter,
24 inches in the ground, with aluminum cap marked:

T36SR15W
S22|S23
S27|S26
2007

THE DEPENDENT RESURVEY OF THE SUBDIVISIONAL LINES,
T. 36 S., R. 15 W., SALT LAKE MERIDIAN, UTAH

CHAINS

Deposit the marked stone in the mound of stone alongside the aluminum post.

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Raise a mound of stone, 3 feet by 2 feet base by 2 feet high, west of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls on a gentle south slope.

N. 1°32.3' E., between sections 22 and 23.

40.715 The 1/4 section corner of sections 22 and 23, monumented with a granite stone, 20x7x6 inches, firmly set, in a mound of stone 3 feet base by 2 feet high, dimly marked 1/4 on west face.

No remaining evidence of the original bearing trees were found.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked:

T36SR15W
1/4
S22|S23
2007

Deposit the marked stone alongside the aluminum post.

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Raise a mound of stone, 3 feet by 2 feet base by 2 feet high, west of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls on a south slope.

N. 1°19.5' W., beginning new measurement.

40.178 The corner of sections 14, 15, 22, and 23, monumented with a mound of stone. No marked stone found. This is accepted as the best available evidence of the position of the original corner.

At the corner point

THE DEPENDENT RESURVEY OF THE SUBDIVISIONAL LINES,
T. 36 S., R. 15 W., SALT LAKE MERIDIAN, UTAH

CHAINS

Set an aluminum post, 30 inches long, 2 1/2 inches diameter,
24 inches in the ground, in a mound of stone 3 feet base to
top of aluminum cap marked:

T36SR15W
S15|S14
S22|S23
2007

Deposit a magnet enclosed in a plastic case at the base of the
aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls on a gentle northeast slope.

From the corner of sections 13, 14, 23, and 24.

S. 86°55.4' W., between sections 14 and 23.

43.440 The 1/4 section corner of sections 14 and 23, monumented with
a granite stone, 18x8x7 inches, firmly set, clearly marked 1/4
on north face.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter,
20 inches in the ground to solid rock, in a mound of stone 3
feet base to top of aluminum cap marked:

T36SR15W
S14
1/4 —
S23
2007

Deposit the marked stone alongside the aluminum post.

Deposit a magnet enclosed in a plastic case at the base of the
aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls on steep northeast slope.

N. 89°20.6' W., beginning new measurement.

40.170 The corner of sections 14, 15, 22, and 23.

N. 0°05.8' E., between sections 14 and 15.

THE DEPENDENT RESURVEY OF THE SUBDIVISIONAL LINES,
T. 36 S., R. 15 W., SALT LAKE MERIDIAN, UTAH

CHAINS

20.147 Point for the S 1/16 section corner of sections 14 and 15, not monumented.

40.294 The 1/4 section corner of sections 14 and 15, monumented with a Tom O. McCullough survey monument, a rebar, 5/8 inch diameter, firmly set, in a mound of stone 2 feet base by 1 feet high, with 1 inch diameter aluminum cap attached, marked: 6918 1/4 15 14 1990. This is accepted as a careful and faithful determination of the original corner position.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 10 inches in the ground to solid rock, in a mound of stone 3 feet base, to top of aluminum cap marked:

T36SR15W
1/4
S15|S14
2007

Deposit rebar and cap at the base of the aluminum post.

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls 10 feet north of two-track road bearing east and west.

N. 0°12.2' E., beginning new measurement.

20.351 Point for the N 1/16 section corner of sections 14 and 15, not monumented.

40.702 The corner of sections 14 and 15 only, monumented with a granite stone, 20x10x10 inches, firmly set, clearly marked with 2 notches on east, and 4 notches on south edges.

From which the original bearing trees

A juniper, 16 inches diameter, bears N. 60° E., 102 links distance, with illegible scribe marks on an open blaze. (Record; N. 52½° E., 100 links)

A juniper, 24 inches diameter, bears S. 72° E., 47 links distance, with illegible scribe marks on an open blaze. (Record; S. 80° E., 48 links)

A juniper stump, 6 feet tall by 6 inches diameter, bears S. 38° W., 68 links distance, with a mostly healed blaze. (Record; S. 35° W.)

THE DEPENDENT RESURVEY OF THE SUBDIVISIONAL LINES,
T. 36 S., R. 15 W., SALT LAKE MERIDIAN, UTAH

CHAINS

A juniper limb, 6 inches diameter, bears N. 10° W., 78 links distance, with illegible scribe marks on an open blaze. (Record; N. 35° W., 76 links)

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with aluminum cap marked:

T36SR15W
S15 | S14
2007

Deposit the marked stone alongside the aluminum post.

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Raise a mound of stone, 3 feet by 2 feet base by 1 foot high, west of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls on a gentle southeast slope.

The Reestablishment of the Survey Executed by A.J. Stewart Jr.
in 1874, and Resurvey by F.T. Roberts in 1909.

From the corner of sections 13 and 14 only.

S. 88°37.1' W., on the north boundary of section 14.

36.092 Point for the 1/4 section corner of section 11 only.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 20 inches in the ground, to solid rock, in a mound of stone 3 feet base to top of aluminum cap marked:

T36SR15W
1/4 S11
2007

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls on a gradual southwest slope in sagebrush and juniper growth.

43.439 The 1/4 section corner of section 14 only, monumented with a juniper, 20 inches diameter, with no visible scribe marks on an open blaze. (Record; marked 1/4 S)

THE DEPENDENT RESURVEY OF THE SUBDIVISIONAL LINES,
T. 36 S., R. 15 W., SALT LAKE MERIDIAN, UTAH

CHAINS

From which the original bearing trees

A juniper limb, 8 inches diameter, bears **S. 55° W., 31 links** distance, with visible scribe marks on an open blaze. (Record; **S. 45° W., 30 links**)

A juniper, 10 inches diameter, bears **N. 45° W., 56 links** distance, with visible scribe marks on an open blaze. (Record; **N. 50° W., 50 links**)

Raise a mound of stone, 3 feet by 3 feet by 3 feet high, with a steel fence post, at the base of the tree.

N. 89°21.3' W., beginning new measurement.

32.723 True point for the closing corner of sections 10 and 11, hereinafter described.

40.484 The corner of sections 14 and 15 only.

The Reestablishment of the Survey Executed by
by F.T. Roberts in 1909.

From the corner of sections 2, 3, 10, and 11, monumented with an iron post, 2 inches diameter, firmly set, projecting 6 inches above the ground, with brass cap marked as described in the official record of the 1909 survey.

A mound of stone is located west of the iron pipe.

A fence line is located 15 feet east of the iron pipe extending S. 35° E., and N. 35° W., on a steep west slope.

S. 0°02.1' E., between sections 10 and 11.

40.116 The 1/4 section corner of sections 10 and 11, monumented with an iron post, 1 inch diameter, firmly set, in a mound of stone, with brass cap marked as described in the official record of the 1909 survey.

From which the original bearing trees

A juniper, 8 inches diameter, bears **N. 75° E., 126 links** distance, scribed 1/4 S11 BT.

A juniper, 10 inches diameter, bears **N. 82° W., 130 links** distance, scribed 1/4 S10 BT.

Set a steel fence post alongside the aluminum post.

Corner falls on a steep, rocky south slope.

THE DEPENDENT RESURVEY OF THE SUBDIVISIONAL LINES,
T. 36 S., R. 15 W., SALT LAKE MERIDIAN, UTAH

CHAINS

S. 0°05.1' E., beginning new measurement.

- 41.296 The closing corner of sections 10 and 11 only, monumented with an iron pipe, 2 inches diameter, firmly set, in a mound of stone, 3 feet base to top of brass cap marked as described in the official record of the 1909 survey.

I add AM and 2007 to brass cap.

from which the original bearing trees

A cedar limb, 8 inches diameter, bears N. 20° E., 41 links distance, scribed "S11 BT". (Record; N. 12° E., 45 links)

A cedar stump, bears N. 47° W., 46 links distance. (Record; N. 47° W., 41 links)

Set a steel fence post alongside the iron pipe.

- 41.319 The true point for the closing corner of section 10 and 11, not monumented.

The Reestablishment of the Survey Executed by
A.J. Stewart Jr. in 1874.

From the corner of sections 22, 23, 26, and 27.

S. 88°52.2' W., between sections 22 and 27.

- 41.322 The 1/4 section corner of sections 22 and 27, monumented with a granite stone, 14x10x6 inches, firmly set, dimly marked 1/4 on north face.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, in a mound of stone 3 feet base to top of aluminum cap marked:

T36SR15W
S22
1/4 —
S27
2007

From which

An aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, for a reference monument, bears S. 46°22.4' W., 4.077 chains distance, with aluminum cap

THE DEPENDENT RESURVEY OF THE SUBDIVISIONAL LINES,
T. 36 S., R. 15 W., SALT LAKE MERIDIAN, UTAH

CHAINS

marked: RM 269.05 FT TO COR S27 2007 and an arrow pointing to the corner.

An aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, for a reference monument, bears **S. 74°13.3' W., 4.473 chains** distance, with aluminum cap marked: RM 295.20 FT TO COR S27 2007 and an arrow pointing to the corner.

Deposit the marked stone alongside the aluminum post.

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls on a gradual north slope in Newcastle Reservoir bed.

N. 88°38.6' W., beginning new measurement.

39.725 The corner of sections 21, 22, 27, and 28, monumented with an Iron County survey monument, an aluminum post, 2 inches diameter, firmly set, in a mound of stone 3 feet base by 1 feet high, with aluminum cap marked:

IRON COUNTY
LS 4501
21|22
28|27
1978

This point was monumented by Stephen R. Platt, Registered Land Surveyor No. 4501, as reported on his plat dated 12/1/1978, and is accepted as a careful and faithful determination of the corner position.

Corner falls on a gentle east facing slope.

N. 0°18.2' W., between sections 21 and 22.

20.198 Point for the S 1/16 section corner of sections 21 and 22.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked:

S 1/16
S21|S22
2007

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

THE DEPENDENT RESURVEY OF THE SUBDIVISIONAL LINES,
T. 36 S., R. 15 W., SALT LAKE MERIDIAN, UTAH

CHAINS

Set a steel fence post alongside the aluminum post.

Corner falls on a gradual southeast slope in sagebrush.

40.396 The 1/4 section corner of sections 21 and 22, monumented with a lava stone, 18x10x7 inches, firmly set, clearly marked 1/4 on west face. (Record; granite stone)

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, on solid rock, in a mound of stone 3 feet base to top of aluminum cap marked:

T36SR15W
1/4
S21|S22
2007

Deposit the marked stone alongside the aluminum post.

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls on a very steep rocky south slope in sagebrush.

N. 0°20.6' W., beginning new measurement.

20.202 Point for the N 1/16 section corner of sections 21 and 22.

Set an aluminum post 30 inches long, 2 1/2 inches diameter, 20 inches in the ground, to solid rock, in a mound of stone 3 feet base to top, with aluminum cap marked:

N 1/16
S21|S22
2007

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls on a steep rocky east slope in sagebrush.

40.404 The corner of sections 15, 16, 21, and 22, monumented with a granite stone, 20x12x8 inches, firmly set, clearly marked 3 notches on east and south edges, and witnessed with a mound of stone to the west.

from which the original bearing trees

THE DEPENDENT RESURVEY OF THE SUBDIVISIONAL LINES,
T. 36 S., R. 15 W., SALT LAKE MERIDIAN, UTAH

CHAINS

A juniper, 20 inches diameter, bears **NORTH, 57 links** distance, with illegible scribe marks on an open blaze. (Record; **N. 10° E.**)

A juniper, 20 inches diameter, bears **S. 44° E., 84 links** distance, with visible scribe marks on an open blaze. (Record; **S. 40° E., 83 links**)

A juniper, 16 inches diameter, bears **S. 38° W., 49 links** distance, with illegible scribe marks on an open blaze. (Record; **S. 30° W., 50 links**)

A juniper, dead and standing, 8 inches diameter, bears **N. 40° W., 96 links** distance, with no visible scribe marks on an open blaze. (Record; **N. 35° W., 94 links**)

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with aluminum cap marked:

T36SR15W	
S16	S15
S21	S22
2007	

Deposit the marked stone alongside the aluminum post.

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Corner falls at the corner of fences extending north and east.

From the corner of sections 14, 15, 22, and 23.

N. 89°57.6' W., between sections 15 and 22.

20.408 Point for the E 1/16 section corner of sections 15 and 22, not monumented.

40.816 Point for the 1/4 section corner of sections 15 and 22, at proportionate distance; there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked:

THE DEPENDENT RESURVEY OF THE SUBDIVISIONAL LINES,
T. 36 S., R. 15 W., SALT LAKE MERIDIAN, UTAH

CHAINS

T36SR15W
S15
1/4 —
S22
2007

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Raised a mound of stone, 2 feet by 2 feet base by 1 feet high, north of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls on flat ground in sagebrush and scattering juniper growth.

From this corner point, a rebar, 5/8 inch diameter, set by unknown individual, firmly set, at the corner of fences extending N. 40° E., and west, with an aluminum cap 2 inches diameter attached, marked: LAPS L67H E295 LS3322, bears **N. 28°21.1' W., 13.43 feet** distance.

81.632 The corner of sections 15, 16, 21, and 22.

N. 0°29.5' E., between sections 15 and 16.

40.600 The 1/4 section corner of sections 15 and 16, monumented with an Iron County survey monument, an iron pipe, 2 inches diameter, firmly set, in a mound of stone 2 feet base to top of brass cap marked:

IRON COUNTY
LS 4501
1/4
16|15
1984

From which

A juniper, 20 inches diameter, bears **S. 30° W., 70 links** distance, with an open blaze.

This point was monumented by Stephen R. Platt, Registered Land Surveyor No. 4501, as reported on his plat dated 12/31/1984, and is accepted as a careful and faithful determination of the corner position.

Corner falls 10 feet west of a dirt road bearing north and south, with a power line parallel to the road, in rolling ground with sagebrush.

N. 0°17.1' E., beginning new measurement.

THE DEPENDENT RESURVEY OF THE SUBDIVISIONAL LINES,
T. 36 S., R. 15 W., SALT LAKE MERIDIAN, UTAH

CHAINS

- 20.393 The N 1/16 section corner of sections 15 and 16, monumented with a 5/8 inch diameter rebar, firmly set, with 1 inch diameter aluminum cap attached, marked: LS 6918 N1/16 15 16 1990.

This point was monumented by Tom O. McCullough, Registered Land Surveyor No. 6918, as reported on his plat dated 2/28/1991, and is accepted as a careful and faithful determination of the corner position.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked:

N 1/16
S16 | S15
2007

Deposit rebar and cap at the base of the aluminum post.

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls on flat ground within the Kern River Natural Gas Pipeline utility corridor.

- 40.786 The corner of sections 9, 10, 15, and 16, monumented with an Iron County survey monument, an iron pipe, 2 inches diameter, firmly set, with brass cap marked:

IRON COUNTY
LS 4501
9 | 10
16 | 15
1984

This point was monumented by Stephen R. Platt, Registered Land Surveyor No. 4501, as reported on his plat dated 12/31/1984, and is accepted as a careful and faithful determination of the corner position.

Found a small mound of stone east of the iron pipe.

Found a steel fence post alongside the iron pipe.

Corner falls in rolling sagebrush.

The Reestablishment of the Survey Executed by A.J. Stewart Jr.
in 1874, and Resurveyed by F.T. Roberts in 1909.

THE DEPENDENT RESURVEY OF THE SUBDIVISIONAL LINES,
T. 36 S., R. 15 W., SALT LAKE MERIDIAN, UTAH

CHAINS

From the corner of sections 14 and 15 only.

N. 89°35.4' W., between sections 10 and 15.

20.291 Point for the E 1/16 section corner of sections 10 and 15, not monumented.

40.582 The 1/4 section corner of sections 10 and 15, monumented with a granite stone, 15x12x8 inches, firmly set, in a small mound of stone, clearly marked 1/4 on north face.

Found a steel fence post alongside the corner.

from which the original bearing trees

A juniper, 8 inches diameter, bears **N. 1° E., 29 links** distance, with no visible scribe marks on an open blaze.
(Record: **50 links**)

A juniper, 16 inches diameter, bears **N. 30° W., 34 links** distance, with no visible scribe marks on an open blaze.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, in a mound of stone to top of aluminum cap marked:

T36SR15W
S10
1/4 —
S15
2007

Deposit the marked stone alongside the aluminum post.

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Reset steel fence post alongside the aluminum post.

Corner falls in rolling sagebrush.

N. 89°46.9' W., beginning new measurement.

20.348 Point for the W 1/16 section corner of sections 10 and 15.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with aluminum cap marked:

S10
W 1/16 —
S15
2007

THE DEPENDENT RESURVEY OF THE SUBDIVISIONAL LINES,
T. 36 S., R. 15 W., SALT LAKE MERIDIAN, UTAH

CHAINS

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Raise a small mound of stone west of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls in wash, drains west, in sagebrush.

40.696 The corner of sections 9, 10, 15, and 16.

N. 0°03.7' E., between sections 9 and 10.

40.511 The 1/4 section corner of sections 9 and 10, monumented with an Iron County survey monument, an aluminum pipe, 2 inches diameter, firmly set, flush in concrete, with aluminum cap marked:

IRON COUNTY
1093
1/4
9 | 10
1978

This point was monumented by Stephen R. Platt, Registered Land Surveyor No. 4501, as reported on his plat dated 12/31/1984, and is accepted as a careful and faithful determination of the corner position.

N. 0°00.3' W., beginning new measurement.

40.246 The corner of sections 3, 4, 9, and 10, monumented with an Iron County survey monument, an iron pipe, 2 inches diameter, firmly set, flush in concrete, with brass cap marked:

IRON COUNTY
1093
4 | 3
9 | 10
1978

Perpetuated and Recorded by Stephen R. Platt land surveyor No. 4501, Instrument No. 206347.

Set a steel fence post alongside the iron pipe.

Corner falls in flat pasture land.

The Reestablishment of the Survey Executed
by F.T. Roberts in 1909.

THE DEPENDENT RESURVEY OF THE SUBDIVISIONAL LINES,
T. 36 S., R. 15 W., SALT LAKE MERIDIAN, UTAH

CHAINS

From the corner of sections 2, 3, 10, and 11.

S. 89°54.6' W., between sections 3 and 10.

- 40.463 The 1/4 section corner of section 3 only, monumented with an iron post, 1 inch diameter, firmly set, in a mound of stone 3 feet base to top, with brass cap marked as described in the official record of the 1909 survey. This corner functions for the 1/4 section corner of section 3 only.

I remove the S10 marks and added the date 2007 to the brass cap.

Corner falls on a steep south facing slope.

S. 89°54.6' W., beginning new measurement.

- 8.288 Point for the 1/4 section corner of section 10 only.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked:

T36SR15W
1/4 S10
2007

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls 15 feet south of a fence line extending east and west, on flat ground in hollow, drains west.

- 28.359 Point for the W 1/16 section corner of section 10 only.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked:

W1/16 S10
2007

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls on flat open ground.

- 48.430 The corner of sections 3, 4, 9, and 10.

THE DEPENDENT RESURVEY OF THE SUBDIVISIONAL LINES,
T. 36 S., R. 15 W., SALT LAKE MERIDIAN, UTAH

CHAINS

The Reestablishment of the Survey Executed by
A.J. Stewart Jr. in 1874, and F.T. Roberts in 1909.

From the corner of sections 21, 22, 27, and 28.

S. 88°14.4' W., between sections 21 and 28.

- 20.151 Point for the E 1/16 section corner of sections 21 and 28, not monumented.
- 40.302 The 1/4 section corner of sections 21 and 28, monumented with a red granite stone, 18x10x6 inches, firmly set, in a mound of stone, clearly marked 1/4 on north face. (Record; volcanic stone)

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 20 inches in the ground, to solid rock, in a mound of stone 3 feet base to top of aluminum cap marked:

T36SR15W
S21
1/4 —
S28
2007

Deposit the marked stone alongside the aluminum post.

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls on a steep southeast slope in sagebrush and piñon growth, and on the north side of the head of wash, drains east.

S. 89°47.8' W., beginning new measurement.

- 40.424 The corner of sections 21 and 28 only, monumented with a stainless steel post, 2 1/2 inches diameter, firmly set, in a mound of stone 3 feet base to top of brass cap marked as described in the official record of the 2004 resurvey.

From which the original bearing trees

A piñon 18 inches diameter, with blaze still visible through a partially healed blaze, bears S. 85° W., 74 links distance. (Record S. 75° E., 100 links)

THE DEPENDENT RESURVEY OF THE SUBDIVISIONAL LINES,
T. 36 S., R. 15 W., SALT LAKE MERIDIAN, UTAH

CHAINS

A piñon 16 inches diameter, with scribe marks removed on an open blaze bears, S. 30° W., 54 links distance.
(Record; S. 29° W., 60 links)

The NE bearing tree a piñon 12 inches diameter, down, dead and rotting with scribe marks visible. Not measured.

No remaining evidence of the northwest bearing tree was found.

Corner falls on top of ridge.

The Reestablishment of the Survey Executed by A.J. Stewart Jr. in 1874, and the Resurvey by F.T. Roberts in 1909, and the Resurvey Executed by L.V. Judd in 2004.

From the west 1/4 section corner of section 21 only, monumented with a stainless steel post, 2 1/2 inches diameter, firmly set, in a mound of stone 2 feet base to top of brass cap marked as described in the official record of the 2004 resurvey.

A steel fence post is located alongside the stainless steel post.

Corner falls on a gradual west slope in sagebrush and scattering juniper growth.

N. 0°25.6' W., between sections 20 and 21.

20.359 The N 1/16 section corner of section 21 only, monumented with a 5/8 inch diameter rebar, firmly set, with a yellow cap attached, and marked:

Platt&Platt INC
LS164659,

A steel fence post is located alongside the rebar.

This point was monumented by Stephen R. Platt, dated 12/31/1984, and is accepted as a careful and faithful determination of the corner position.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 12 inches in the ground, to solid rock, in a mound of stone 3 feet base to top of aluminum cap marked:

| N 1/16
| S21
2007

THE DEPENDENT RESURVEY OF THE SUBDIVISIONAL LINES,
T. 36 S., R. 15 W., SALT LAKE MERIDIAN, UTAH

CHAINS

Deposit the rebar and cap at the base of the aluminum post.

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Reset the steel fence post alongside the aluminum post.

Corner falls in corner of fences extending north and east, on a gradual north slope in sagebrush and scattering juniper growth.

N. 0°22.5' W., beginning new measurement.

18.313 The true point for the closing corner of sections 17 and 20.

From this point, the closing corner, monumented with a nail, set 2 inches beneath the road surface, bears **WEST, 0.014 chains** distance.

20.362 The corner of sections 16 and 21 only, monumented with a nail set flush with the surface of a road.

This point was monumented by Stephen R. Platt, as reported on his plat dated 12/31/1984, and is accepted as a careful and faithful determination of the corner position.

Form the corner of sections 15, 16, 21, and 22.

S. 89°55.5' W., between sections 16 and 21.

20.149 Point for the E 1/16 section corner of sections 16 and 21.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked:

S16
E 1/16 —
S21
2007

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Raise a small mound of stone west of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls on a gradual west slope at the edge of old burn.

40.298 The 1/4 section corner of sections 16 and 21, monumented with an Iron County survey monument, an aluminum pipe, 2 inches diameter, firmly set, projecting 3 inches above ground, with aluminum cap marked:

THE DEPENDENT RESURVEY OF THE SUBDIVISIONAL LINES,
T. 36 S., R. 15 W., SALT LAKE MERIDIAN, UTAH

CHAINS

IRON COUNTY

16

1/4 —

21

1978

This point was monumented by Stephen R. Platt, Registered Land Surveyor No. 4501, as reported on his plat dated 12/31/1984, and is accepted as a careful and faithful determination of the corner position.

Corner falls in the corner of fences extending north and west, on an east facing slope.

S. 88°48.4' W., beginning new measurement.

40.386 The corner of sections 16 and 21 only.

The Subdivision of Section 10,
T. 36 S., R. 15 W., Salt Lake Meridian, Utah.

From the 1/4 section corner of sections 10 and 15.

N. 0°21.5' W., on the N-S centerline of section 10.

40.792 Point for the center 1/4 section corner, at the intersection with the E-W centerline.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked:

T36SR15W

C 1/4

S10

2007

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Raise a mound of stone, 2 feet by 2 feet base by 1 feet high, west of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls on a gradual west slope in sagebrush.

80.979 The 1/4 section corner of section 10 only.

From the 1/4 section corner of sections 10 and 11.

THE SUBDIVISION OF SECTION 10,
T. 36 S., R. 15 W., SALT LAKE MERIDIAN, UTAH

CHAINS

S. 89°49.4' W., on the E-W centerline of section 10.

48.530 The center 1/4 section corner of section 10.

68.726 Point for the center W 1/16 section corner of section 10.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter,
22 inches in the ground, in a mound of stone 2 feet base to
top of aluminum cap marked:

W 1/16
C — C
S10
2007

Deposit a magnet enclosed in a plastic case at the base of the
aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls on flat ground within the Kern River Natural Gas
Pipeline utility corridor.

88.922 The 1/4 section corner of sections 9 and 10.

From the W 1/16 section corner of sections 10 and 15.

N. 0°08.9' W., on the N-S centerline of the SW 1/4 of section
10.

40.651 The center W 1/16 section corner of section 10.

From the center W 1/16 section corner of section 10.

N. 0°10.9' W., on the N-S centerline of the NW 1/4 of section
10.

40.217 The W 1/16 section corner of section 10 only.

The Subdivision of Section 15,
T. 36 S., R. 15 W., Salt Lake Meridian, Utah.

From the 1/4 section corner of sections 15 and 22.

N. 0°18.6' E., on the N-S centerline of section 15.

20.223 Point for the center S 1/16 section corner of section 15.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter,
24 inches in the ground, with aluminum cap marked:

THE SUBDIVISION OF SECTION 15,
T. 36 S., R. 15 W., SALT LAKE MERIDIAN, UTAH

CHAINS

C
S 1/16 | S15
C
2007

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls 37 feet south of a power line road that bears S. 50° E., and N. 50° W., on flat ground in sagebrush.

40.446 Point for the center 1/4 section corner of section 15, at the intersection with the E-W centerline.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked:

T36SR15W
C 1/4
S15
2007

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls on a gradual southwest slope in sagebrush and juniper growth.

60.852 Point for the center N 1/16 section corner of section 15.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 20 inches in the ground, to solid rock, in a mound of stone 3 feet base to top of aluminum cap marked:

C
N 1/16 | S15
C
2007

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls on north edge of blade line, in sagebrush and juniper growth.

81.258 The 1/4 section corner of sections 10 and 15.

From the 1/4 section corner of sections 14 and 15.

THE SUBDIVISION OF SECTION 15,
T. 36 S., R. 15 W., SALT LAKE MERIDIAN, UTAH

CHAINS

N. 89°44.7' W., on the E-W centerline of section 15.

20.331 Point for the center E 1/16 section corner of section 15.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, to solid rock, in a mound of stone 3 feet base to top of aluminum cap marked:

E 1/16
C — C
S15
2007

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls on a gradual north slope in sagebrush, piñon, and juniper growth.

40.662 The center 1/4 section corner of section 15.

81.344 The 1/4 section corner of sections 15 and 16.

From the center E 1/16 section corner of section 15.

N. 0°15.4' E., on the N-S centerline of the NE 1/4 of section 15.

20.378 Point for the NE 1/16 section corner, at the intersection with the E-W centerline of the NE 1/4 of section 15.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked:

NE 1/16
S15
2007

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls 1.40 feet east of a fence line extending north and south, on flat ground in sagebrush and scattering juniper growth.

From this corner point, a rebar 5/8 inch diameter, set by unknown individual, with no cap attached, bears N. 3°38.6' W., 5 feet distance.

40.756 The point for the E 1/16 section corner of sections 10 and 15.

THE SUBDIVISION OF SECTION 15,
T. 36 S., R. 15 W., SALT LAKE MERIDIAN, UTAH

CHAINS

From the point for the N 1/16 section corner of sections 14 and 15.

N. 89°40.0' W., on the E-W centerline of the NE 1/4 of section 15.

20.311 The NE 1/16 section corner of section 15.

40.622 The center N 1/16 section corner of section 15.

From the point for the E 1/16 section corner of sections 15 and 22.

N. 0°12.2' E., on the N-S centerline of the SE 1/4 of section 15.

20.185 Point for the SE 1/16 section corner, at the intersection with the E-W centerline of the SE 1/4 of section 15.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked:

SE 1/16
S15
2007

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls on flat ground in sagebrush.

From this corner point, a 5/8 inch diameter rebar, set by unknown individual, with no cap attached, bears **N. 7°52.5' W.**, **9.86 feet** distance.

40.370 The center E 1/16 section corner of section 15.

From the point for the S 1/16 section corner of sections 14 and 15.

N. 89°51.1' W., on the E-W centerline of the SE 1/4 of section 15.

20.369 The SE 1/16 section corner of section 15.

40.738 The center S 1/16 section corner of section 15.

From the center N 1/16 section corner of section 15.

THE SUBDIVISION OF SECTION 15,
T. 36 S., R. 15 W., SALT LAKE MERIDIAN, UTAH

CHAINS

N. 89°45.8' W., on the E-W centerline of the NW 1/4 of section 15.

40.689 The N 1/16 section corner of sections 15 and 16.

The Subdivision of Section 21,
T. 36 S., R. 15 W., Salt Lake Meridian, Utah.

Form the 1/4 section corner of sections 21 and 28.

N. 0°20.1' W., on the N-S centerline of section 21.

20.515 Point for the center S 1/16 section corner of section 21, not monumented.

41.030 Point for the center 1/4 section corner, at the intersection with the E-W centerline of section 21.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, in a mound of stone 3 feet base to top of aluminum cap marked:

T36SR15W
C 1/4
S21
2007

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls on a gradual northwest slope in sagebrush, piñon, and juniper growth.

61.508 The center N 1/16 section corner of section 21, monumented with a cedar post, 5 inches diameter, 5.60 feet tall, in the corner of fence lines extending north and west. This post is accepted as a careful and faithful determination of the corner position. I therefore level off the top of the cedar post and place a PK nail in center of steel plate marked:

BLM CADASTRAL
C
N 1/16 | S21
C
2007

From which

An aluminum post, 30 inches long, 2 1/2 inches diameter, 20 inches in the ground, in a mound of stone, 2 feet base, for a reference monument, bears N. 0°16.1' E., 0.159

THE SUBDIVISION OF SECTION 21,
T. 36 S., R. 15 W., SALT LAKE MERIDIAN, UTAH

CHAINS

chains distance, with aluminum cap marked: RM 10.50 FT TO COR 2007 S21 and an arrow pointing to the corner.

An aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, for a reference monument, bears **S. 88°26.7' W., 0.566 chains** distance, with aluminum cap marked: RM 37.37 FT TO COR 2007 S21 and an arrow pointing to the corner.

Found a mound of stone alongside the cedar post.

Found a steel fence post alongside the cedar post.

I rebuild the mound of stone, 3 feet by 3 feet base by 1 feet high, west of the cedar post.

Corner falls on west side of small wash, drains N. 46° E., in sagebrush and juniper growth.

81.986 The 1/4 section corner of sections 16 and 21.

From the 1/4 section corner of sections 21 and 22.

S. 89°08.4' W., on the E-W centerline of section 21.

20.155 Point for the center E 1/16 section corner of section 21.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 10 inches in the ground, to solid rock, in a mound of stone 4 feet base to top of aluminum cap marked:

E 1/16
C — C
S21
2007

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls on a very steep rocky northeast slope in sagebrush.

40.310 The center 1/4 section corner of section 21.

80.651 The 1/4 section corner of section 21 only.

From the center E 1/16 section corner of section 21.

N. 0°20.3' W., on the N-S centerline of the NE 1/4 of section 21.

THE SUBDIVISION OF SECTION 21,
T. 36 S., R. 15 W., SALT LAKE MERIDIAN, UTAH

CHAINS
20.340

Point for the NE 1/16 section corner, at the intersection with the E-W centerline of the NE 1/4 of section 21.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with aluminum cap marked:

NE 1/16
S21
2007

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Set two steel fence posts alongside the aluminum post.

Corner falls in Pinto Creek.

40.680

The E 1/16 section corner of sections 16 and 21.

From the N 1/16 section corner of sections 21 and 22.

S. 89°32.0' W., on the E-W centerline of the NE 1/4 of section 21.

20.151

The NE 1/16 section corner of section 21.

40.302

The center N 1/16 section corner of section 21.

From the point for the E 1/16 section corner of sections 21 and 28.

N. 0°19.1' W., on the N-S centerline of the SE 1/4 of section 21.

20.356

Point for the SE 1/16 section corner, at the intersection with the E-W centerline of the SE 1/4 of section 21.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, in a mound of stone 3 feet base to top of aluminum cap marked:

SE 1/16
S21
2007

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls on a gradual north slope in sagebrush and piñon growth.

40.712

The center E 1/16 section corner of section 21.

THE SUBDIVISION OF SECTION 21,
T. 36 S., R. 15 W., SALT LAKE MERIDIAN, UTAH

CHAINS

From the S 1/16 section corner of sections 21 and 22.

S. 88°41.4' W., on the E-W centerline of the SE 1/4 of section 21.

20.152 The SE 1/16 section corner of section 21.

40.304 The center S 1/16 section corner of section 21.

Form the center N 1/16 section corner of section 21.

S. 88°58.3' W., on the E-W centerline of the NW 1/4 of section 21.

40.372 The N 1/16 section corner of section 21 only.

The Subdivision of Section 22,
T. 36 S., R. 15 W., Salt Lake Meridian, Utah.

From the 1/4 section corner of sections 22 and 27.

N. 0°27.5' E., on the N-S centerline of section 22.

41.425 Point for the center 1/4 section corner, at the intersection with the E-W centerline of section 22.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 20 inches in the ground, to solid rock, in a mound of stone 3 feet base to top of aluminum cap marked:

T36SR15W
C 1/4
S22
2007

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls on a gradual east slope in piñon and juniper growth.

81.714 The 1/4 section corner of sections 15 and 22.

From the 1/4 section corner of sections 22 and 23.

S. 89°52.5' W., on the E-W centerline of section 22.

THE SUBDIVISION OF SECTION 22,
T. 36 S., R. 15 W., SALT LAKE MERIDIAN, UTAH

CHAINS

- 42.072 The center 1/4 section corner of section 22.
82.327 The 1/4 section corner of sections 21 and 22.
-

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS

Name	Capacity
C. Scott Bishop	Cadastral Surveyor
Calvert Norton	Survey Technician
Quade Johnson	Survey Technician

CERTIFICATE OF SURVEY


I, *Jeremy D. Davis*, Cadastral Surveyor, under the supervision of *Ronald K. Baugh*, Supervisory Cadastral Surveyor, HEREBY CERTIFY upon honor, that in pursuance of Special Instructions bearing the date of *April 27, 2007*, I have *dependently resurveyed a portion of the east boundary, a portion of the subdivisional lines, and the subdivision of sections 10, 15, 21, and 22, in Township 36 South, Range 15 West*, of the *Salt Lake* Meridian, in the State of *Utah*, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.


Sept 7 2010

Date

Sept 09, 2010

Date

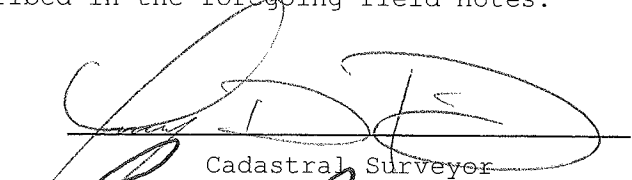

Cadastral Surveyor


Supervisory Cadastral Surveyor


CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
Salt lake City, Utah

The foregoing field notes of the *dependent resurvey of a portion of the east boundary, a portion of the subdivisional lines, and the subdivision of sections 10, 15, 21, and 22, in Township 36 South, Range 15 West, Salt Lake Meridian, Utah*, executed by *Jeremy D. Davis*, Cadastral Surveyor, under the supervision of *Ronald K. Baugh*, Supervisory Cadastral Surveyor, having been critically examined and found correct, are hereby approved.

September 14, 2010

Date

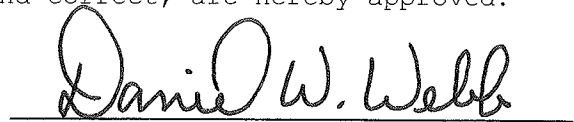

Chief Cadastral Surveyor for Utah